



Aluminium Bi-Folding Door Order Form

Order - Please Process

Quote Request Only

Date _____

Your Details

Ordered By _____

Company Name _____

Address _____

Postcode _____

Telephone _____

Fax _____

Email _____

Customer Order Number _____

Reference _____

Delivery Date Request _____

Site Address and Contact Details

Contact Name _____

Delivery Address: _____

Postcode: _____

Telephone _____

Frame Options (sashes always assembled)

Fully Assembled

Outerframe With Sashes Separate

Kit Form - Outerframe Unassembled/Sashes Separate

Standard Over 2500mm high or 6450 wide

Dimensions

Overall Frame Height (mm) _____

Overall Frame Width (mm) _____

Open In

Open Out

Cill size (included in overall frame height) Cill height is 25mm

No cill 150mm 90mm 180mm 230mm

Cill with horns Cill flush with door frame width

Cills are supplied at the same width as the frame unless a specific length is requested

Add-On Profiles

20mm to: Head LHS RHS

38mm to: Head LHS RHS

Frame Threshold Detail

Standard Threshold

20mm Low Threshold (Now Powder Coated)

Threshold Ramp (Now Powder Coated) Int. Ext.

NEW 55mm Integrated Cill/Standard Threshold

Standard Stock Colours

White RAL 9016 Gloss

Grey RAL 7016 Matt

Grey RAL 7016 (Ext) White RAL 9015 (Int)

Black RAL 9005 Semi-Gloss

Dual & Special RAL Colours

Internal RAL _____

External RAL _____

Trickle Ventilation

Number of Vents

1

2

3

4

In Sashes

1

2

3

4

5

6

In 38mm add on to head

Over sash

Over mullion

Drainage Required?

With Cill

Concealed (default)

Face

No Cill

Face

No Drainage

Handle Colours

Master Door Handle

White

Grey

Black

Satin

Chrome

Shootbolt Handle

White

Grey

Black


Satin

Chrome


Scheme



Total Leaves



Leaving Folding Left



Leaving Folding Right

Super slim sightlines (sash-sash 121mm)

Standard rebated and low threshold options

Maximum frame height 3000mm and sash width 1200mm

Maximum sash weight 120kg

System achieves U values of 1.4-1.7W/m2.K

Adjustable jambs provide simple adjustment

Super smooth bottom running

High performance 30mm polyamide thermal break
Stock colours on short reliable lead times


Qualicoat "Seaside" specification powder coating as standard

Intermediate doors offer shoot bolt locking with single point handle. Key locking is optional.
(insurance recommended for schemes with no master door)

High strength magnetic door catches

Doors can open in or out

Tested to PAS 24 and BS6375 Part 1 & 2 along with BS6375-1:2004 achieving Severe Weather Rating

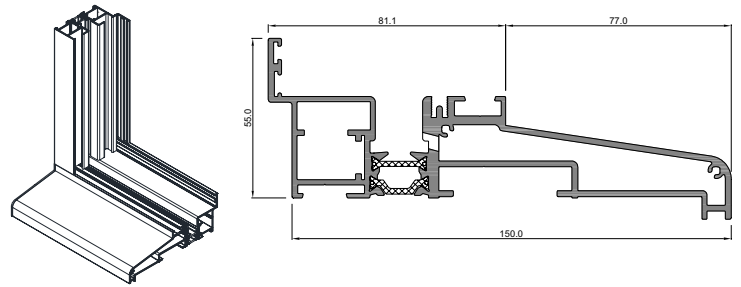

NEW Integrated Standard rebated threshold / cill option

Scheme 2-2-0 or 2-0-2



Scheme 3-3-0 or 3-0-3




Scheme 3-2-1 or 3-1-2



Scheme 4-4-0 or 4-0-4



Scheme 4-3-1 or 4-1-3



Scheme 5-5-0 or 5-0-5



Scheme 5-4-1 or 5-1-4



Scheme 5-3-2 or 5-2-3





Scheme 6-6-0 or 6-0-6



Scheme 6-5-1 or 6-1-5



Scheme 6-3-3L or 6-3-3R

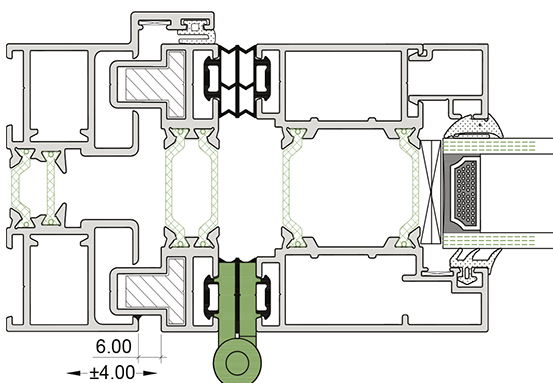

Installation made simple

Toe and heeling of sashes is always required.

With adjustable jambs to both sides installers can correct issues that can often require repeat visits (doors must be square and level).

All doors are fully assembled and quality controlled in rigs

Throughout manufacture all components, finish and operation are carefully checked.